



Blister Pack Inspection System


**JEKSON**

USA

Sr. No.	SPECIFICATIONS	JEKSON
1	Type	Monochrome
2	Principal of Detection	Contour & Dimensions
3	Teach-in Time	2-3 min
4	Tracks	4(5 optional)
5	Objects per image/Blister:	250
6	MAX Format Width	260mm
7	Illumination	Infrared / White LED Back Light
8	Min. Object Size	3mm
9	Base Film Possible	
	a) PVC Clear	YES
	b) PVC Opaque	YES
	c) ACLAR Film	YES
	d) Color PVC	YES
	e) ALU foil	YES(Optional)
10	Object Classifications	
	a) Presence	YES
	b) Size	YES
	c) Broken Tablet	YES
	d) Double Product Detection	YES
	e) Position Error	YES
	f) Extra Product Detection	YES
11	Shift Register Size	200
12	Machine Type	
	Continuous	Yes
	Intermittent	Yes
13	Evaluation Speed	300 images/min
14	Manuals/DQ/IQ/OQ	YES
15	Report Generations/Diagnostics	YES
16	Multi User Password Access	YES
17	21 CFR Part 11 Compliance	YES



<b>Power:</b>	100 -240 VAC / 50 - 60 Hz for controller 24 V, 6.5 Amp Power Supply for illumination & camera
<b>Inputs:</b>	1- Trigger 1- External acknowledgment
<b>Outputs:</b>	4 (Good Track Signal) 1 Emergency Signal/ Machine Interlocking Signal 1 illumination signal
<b>Interfaces:</b>	USB 2.0 VGA external monitor port Printer Port LAN connections
<b>Monitor:</b>	15" Flat Panel Display

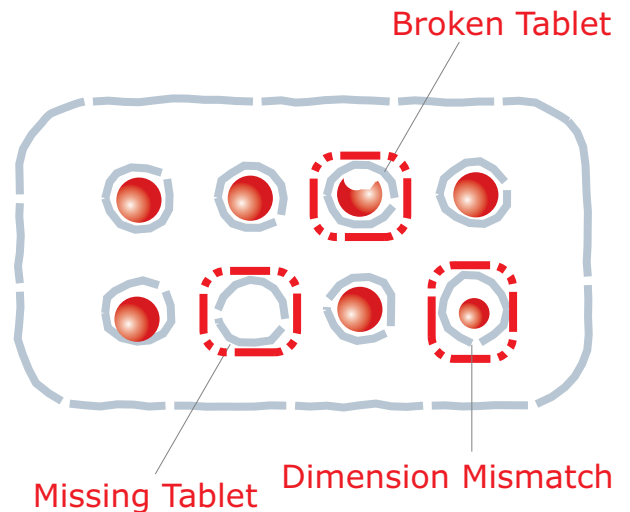

## Illumination Types

Base foil material	Back illumination	Top illumination (optional)	Filters
Clear PVC	X		
Opaque PVC	X	X	X
Alu/Alu		X	X
After Sealing		X	X